


# C20 PVC Tape



## PRODUCT DESCRIPTION

Venhart's C20 coloured PVC tape is smooth tape with a natural rubber solvent adhesive. Extremely versatile with high visibility making it suitable for a range of applications. C20 also features excellent tack, long lasting adhesion and silent unwinding. It comes in a wide range of colours and sizes.

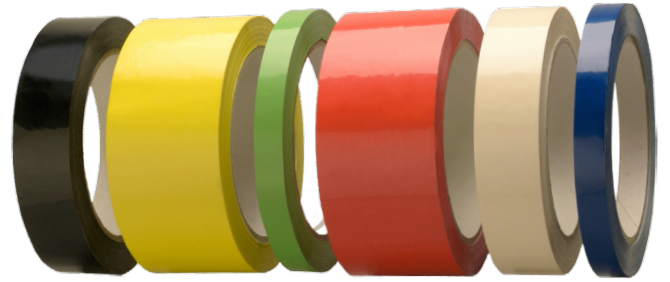

## APPLICATION INFORMATION

- Used in bag neck sealing, general packaging, product identification.
- Excellent adhesion even on recycled cartons.
- Easily printable with solvent based inks.
- Easy unwind and fast printability.
- Ideal for storage in extreme temperature conditions and high moisture environments once applied.










## PHYSICAL PROPERTIES

<b>Total Thickness</b>	55µm	<b>Adhesive Type</b>	Natural rubber and hydrocarbon resins
<b>Film Thickness</b>	34-37µm	<b>Elongation at Break</b>	≥ 60%
<b>Tensile Strength</b>	53N/cm	<b>Peel Adhesion</b>	2,4N/cm
<b>Backing</b>	Unplasticized assorted colour PVC film		



## AVAILABLE SIZES & COLOURS

\* Tolerances: Thickness +/- 2µm; Width +/- 1mm

<b>Standard width</b>	12mm, 19mm, 24mm, 38mm & 48mm	<b>Colours</b>	 Red	 Green
<b>Core size</b>	76mm (3 in)		 Yellow	 Blue
<b>Length</b>	66M		 Light Blue	 Orange
			 FL Orange	 White
			 Black	



## STORAGE & TEMPERATURE CONDITIONS

<b>Storage</b>	Tape performance is guaranteed within the first 12 months. Products must be kept in its original box and in a dry atmosphere, away from direct sunlight
<b>Storage Temp</b>	10C – 45C
<b>Application Temp</b>	-25C – 65C

Note: The following technical information and data should be considered representative or typical only.